


Hiab Multilift XP Classic range hooklifts



Technical information

XP22S

| Type | XP22S.59 | XP22S.61 |
|-----------------------------------|----------|----------|
| Vehicle type | 3-axle | |
| Gvw of the vehicle (t) | 26 | |
| Capacity (t) | 22 | |
| G-length | 5860 | 6080 |
| System weight (kg) * | 2530 | 2550 |
| Tipping angle (°) | 53 | 49 |
| Max. operating pressure (mpa) | 30 | |
| Recommended max. oil flow (l/min) | 100 | |

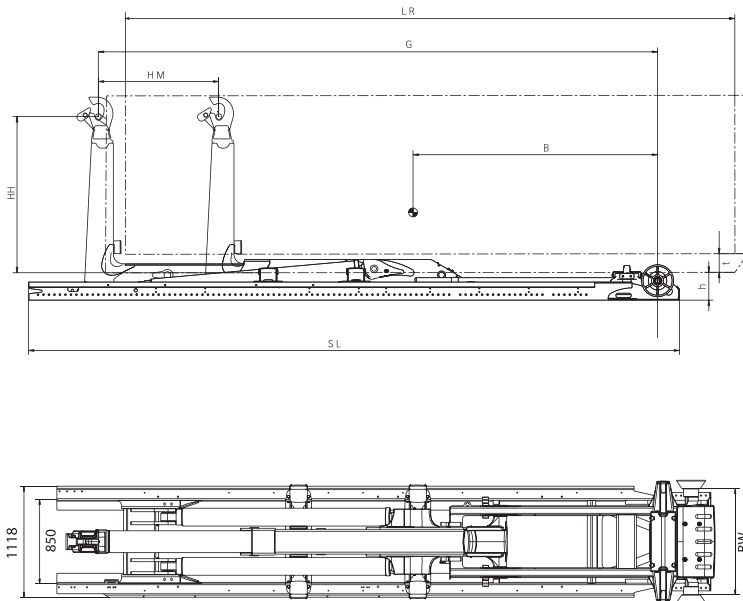

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

We reserve the rights for modifications.

Illustrations do not always show an equipment in standard version.

| Model | XP22S.59 | XP22S.61 |
|---|---------------------|---------------------|
| LR = Body length (m) min - max | 4.7 – 6.9 | 4.9 – 7.1 |
| SL = Subframe length (mm) ** | 6563 | 6733 |
| B = Centre of gravity (mm) | 3000 | 3150 |
| G = Exact g-length (mm) | 5860 | 6080 |
| HM = Horizontal movement (mm) | 1450 | 1450 |
| t = Min. free tunnel height (body) (mm) | 125 | 125 |
| h = Installation height (mm) | 250 | 250 |
| BW = Body width (mm) | 1070 | 1070 |
| HH = Hook height (Mm) | 1425/1450/1570/1575 | 1425/1450/1570/1575 |

Cargotec improves the efficiency of cargo flows on land and at sea - wherever cargo is on the move. Cargotec's daughter brands, Hiab, Kalmar and MacGregor are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. www.cargotec.com



Cargotec Finland Oy
 Nesteentie 36, P.O.Box 39
 FI-21201 Raisio, Finland
 tel. +358 204 55 2399
 fax +358 204 55 2231
www.hiab.com