


MULTILIFT ULTIMA 24ZL


LOW-BUILT HOOKLIFT

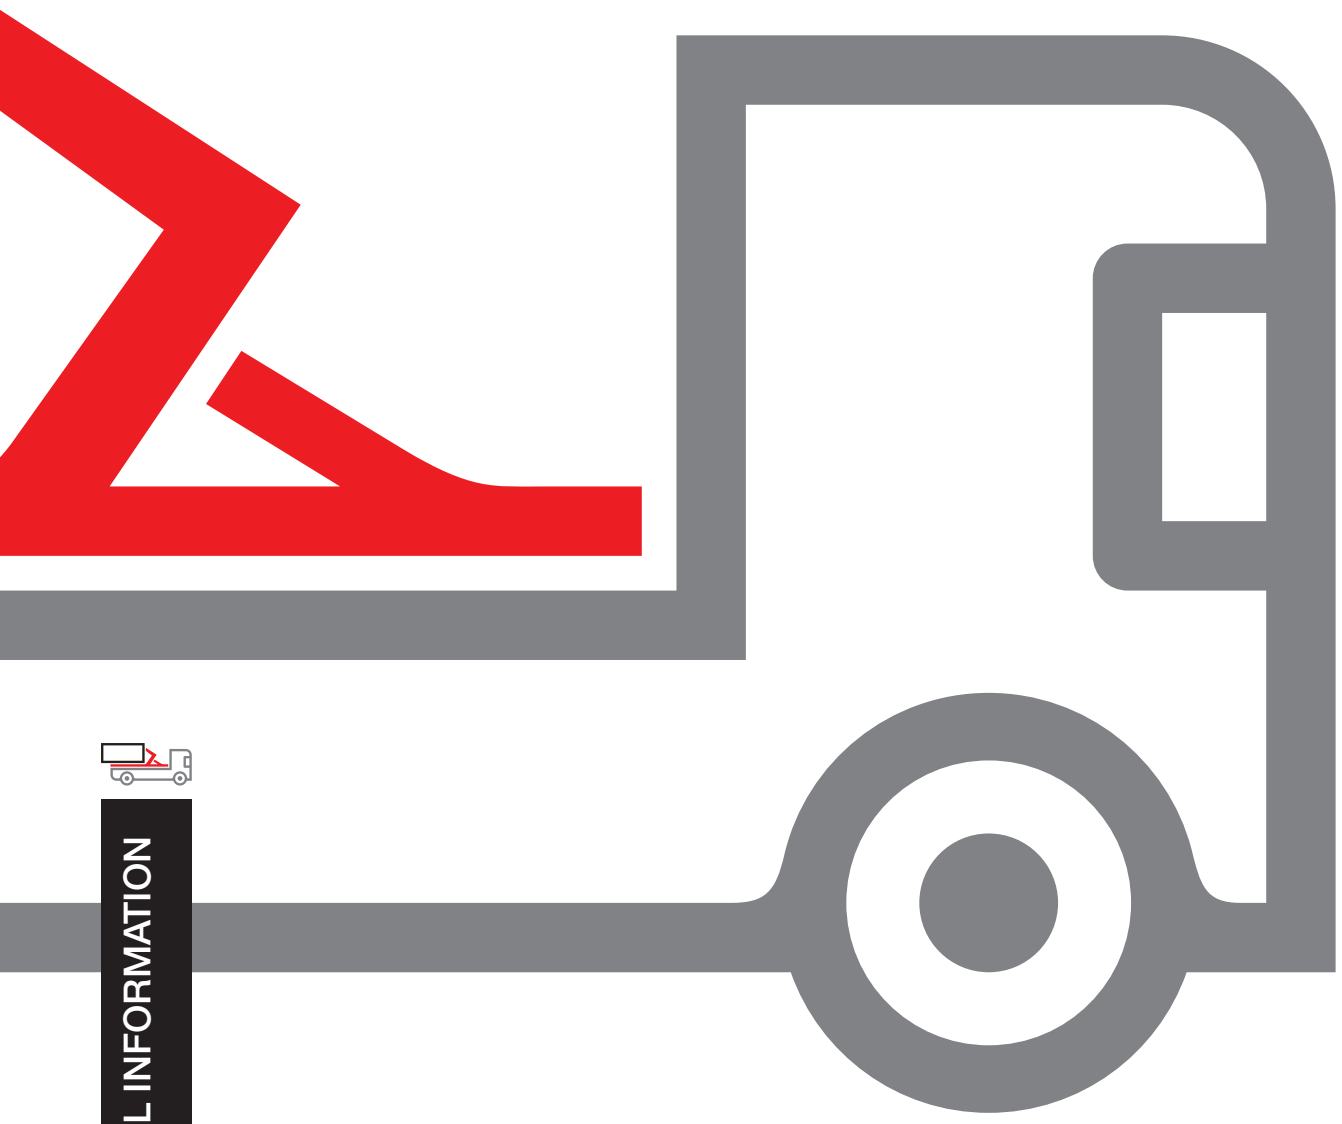

TECHNICAL INFORMATION

MULTILIFT ULTIMA 24ZL BASIC DATA

Type	ULTIMA 24ZL		
Vehicle type	4 axle		
GVW of the vehicle (t)	32		
Capacity (t)	24		
G-length	56	58	59
System weight (kg) *	2730	2780	2780
Tipping angle (°)	52	52	52
Max. operating pressure (MPa)	30		
Recommended oil flow (l/min)	100		

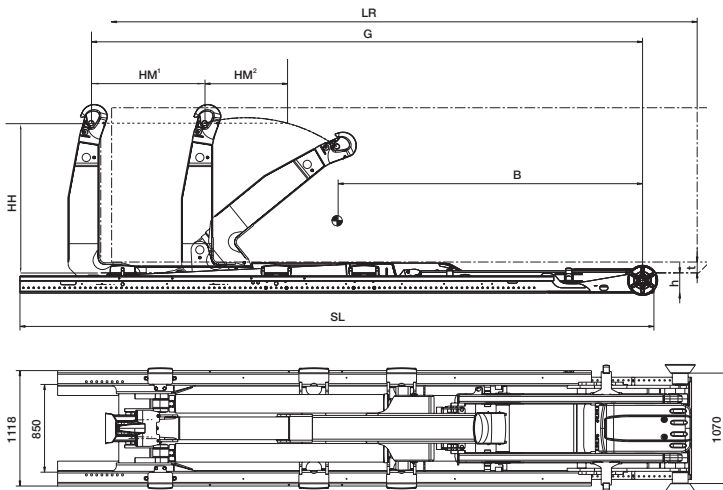

Primary dimensions

Technical data	ULTIMA 24ZL.56	ULTIMA 24ZL.58	ULTIMA 24ZL.59
LR = Body length (m) (min – max)	4.0 - 6.6	4.2 - 7.0	4.3 - 7.0
SL = Subframe length (mm) **	6443	6443	6443
BW = Body width (mm)***	1070		
B = Centre of gravity (mm)	3350	3450	3450
G = Exact G-length (mm)	5600	5800	5900
HM = Horizontal movement (mm)***	1100 + 880		
t = Min free tunnel height (body) (mm)***	105 / 85		
h = Installation height (mm)	195 / 215		
HH = Hook height (mm)	1450 / 1570		

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

*** Varies depending on country and body standard

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.