


TRUCK MOUNTED FORKLIFTS
MOFFETT M9 60.3



TECHNICAL INFORMATION:
M9 60.3



MOFFETT M9 60.3

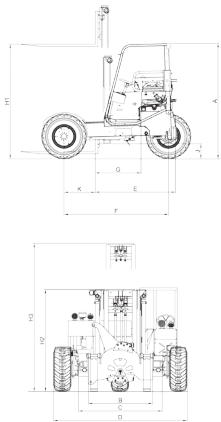

MODEL		M9 60.3
	TYPE	POULTRY
1	CAPACITY @ 24" LOAD CENTER	6000 lbs
2	DIESEL ENGINE	56 hp
3	ENGINE EMISSION COMPLIANCE	EPA Tier4 Final
4	MAXIMUM RPM	3000 rpm
5	ELECTRICAL SYSTEM	12 Volt
6	DRIVE WHEELS	3
7	STEERING	Hydrostatic
8	TIRE SIZE (SKID STEER)	31.5 x 13 - 16.5, 10-PLY
9	TIRE OUTSIDE DIAMETER	31"
10	TIRE WIDTH	13"
11	MAXIMUM SPEED	11 mph
12	MAXIMUM GRADABILITY	30%
13	TURNING RADIUS	90"
14	UNLADEN WEIGHT	7230 lbs
15	WORKING PRESSURE FOR ATTACHMENTS	2500 psi
16	TILT OF MAST (FORWARD/BACK)	10° / 8°
17	SIDESHIFT	5"
18	FORK SECTION	74" x 5" x 1.75"
19	MAST CARRIAGE TRAVEL	37"
A	OVERHEAD GUARD HEIGHT	82"
B	FORK CARRIAGE WIDTH	46"
C	FRAME OPENING	58"
D	OVERALL WIDTH	95"
E	MINIMUM OVERHANG (Rear Wheel Turned 180°)	60"
F	WHEEL BASE	74.25"
G	C. OF G. FROM FORK FACE	18"
H1	LIFT HEIGHT	124"(28" Freelift)
H2	MAST HEIGHT (COLLAPSED)	81"
H3	MAST HEIGHT (RAISED)	184"
J	GROUND CLEARANCE	9"
K	FACE OF FORK TO CENTER OF FRONT TIRE	21"
L	ANSI STANDARD	B56.6

NOTES: The above specifications are not binding upon the manufacturer and may be changed without prior notice.
Weights may vary depending on tire and/or fork option.

© Copyright 2015 Hiab USA Inc. All rights reserved. No part of this document may be reproduced without the prior written consent of Hiab USA Inc.



In less than a minute, the Moffett can mount or dismount a truck or trailer and be ready for work.

hiab.us.com

Hiab USA Inc.
12233 Williams Road
Perrysburg, Ohio 43551 USA
tel. +419 482 6000
fax +419 482 6001



V2015.01.14