


MULTILIFT ULTIMA 20ZL


LOW-BUILT HOOKLIFT

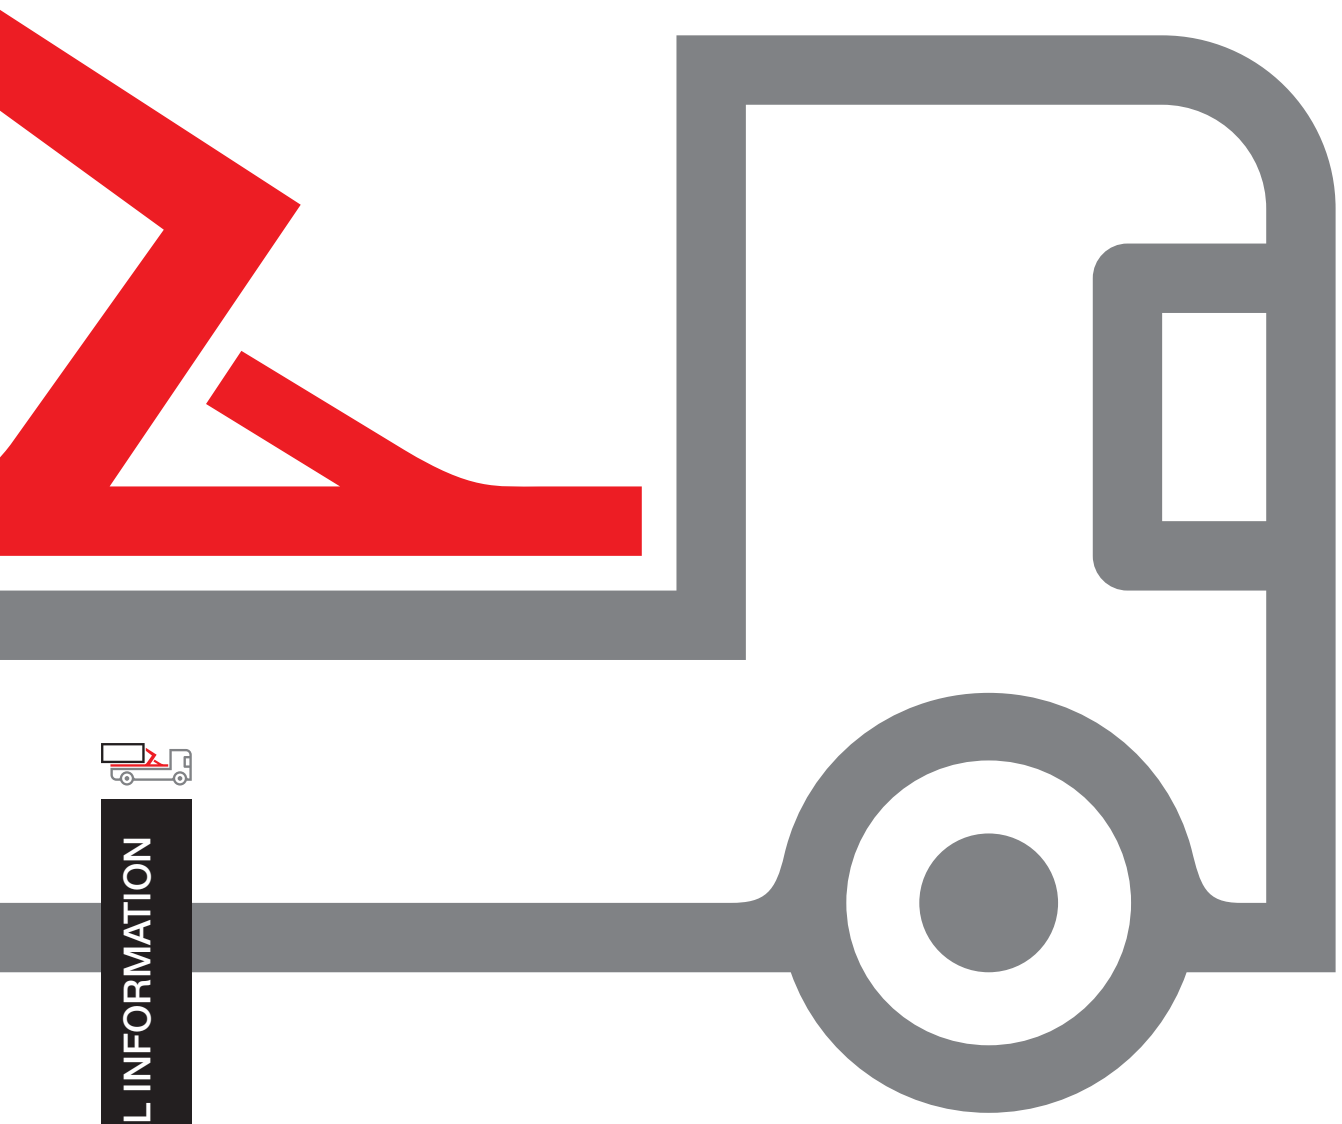

TECHNICAL INFORMATION

MULTILIFT ULTIMA 20ZL BASIC DATA

Type	ULTIMA 20ZL			
Vehicle type	3 axle			
GVW of the vehicle (t)	26			
Capacity (t)	20			
G-length	53	56	58	59
System weight (kg) *	2580	2650	2690	2650
A = Tipping angle (°)	55	52	52	52
Max. operating pressure (MPa)	30			
Recommended oil flow (l/min)	100			

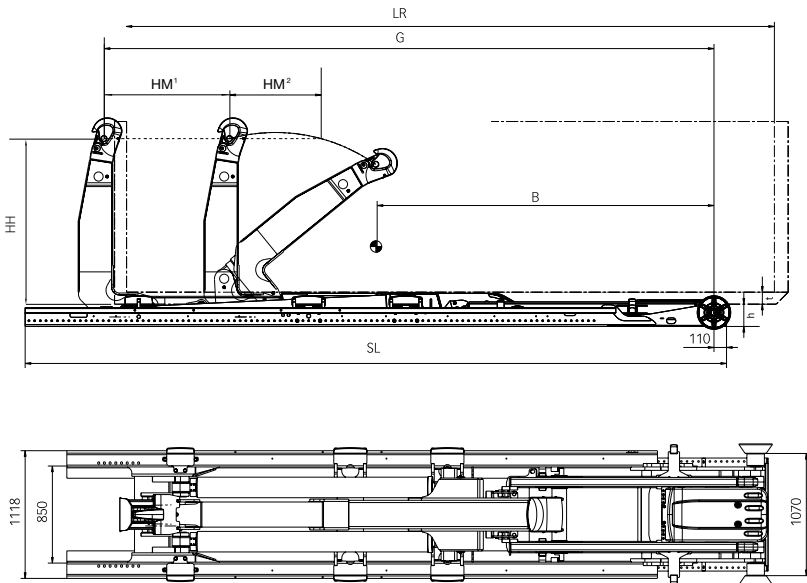

Primary dimensions

Technical data	ULTIMA 20ZL.53	ULTIMA 20ZL.56	ULTIMA 20ZL.58	ULTIMA 20ZL.59
LR = Body length (m) (min – max)	3.8 - 6.4	4.0 - 6.6	4.5 - 7.0	4.5 - 7.0
BW = Body width (mm)	1070			
SL = Subframe length (mm) **	6143	6443	6443	6443
B = Centre of gravity (mm)	3220	3350	3450	3450
G = Exact G-length (mm)	5380	5600	5800	5900
HM = Horizontal movement (mm)***	1100 + 800			
t = Min free tunnel height (body) (mm)***	105 / 85			
h = Installation height (mm)	195 / 215			
HH = Hook height (mm)	1450 / 1570			

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

*** Varies depending on country and body standard

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.