


# MULTILIFT ULTIMA 21SL


## LOW-BUILT HOOKLIFT

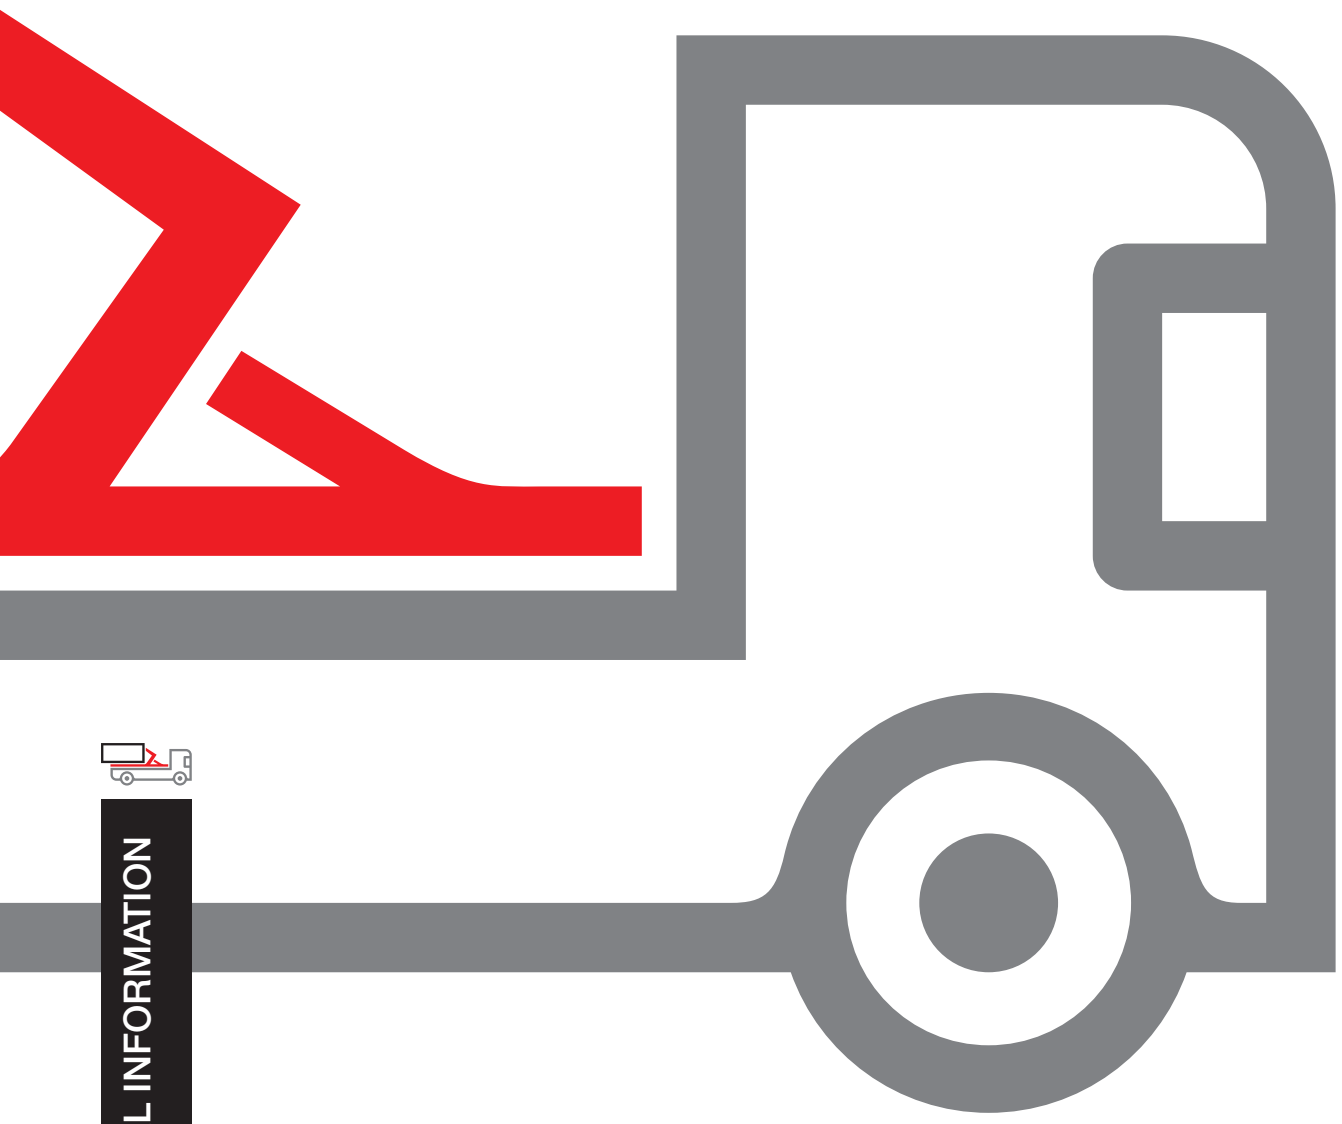

TECHNICAL INFORMATION

# MULTILIFT ULTIMA 21SL BASIC DATA

| Type                          | ULTIMA 21SL |      |      |      |      |
|-------------------------------|-------------|------|------|------|------|
| Vehicle type                  | 3 axle      |      |      |      |      |
| GVW of the vehicle (t)        | 26          |      |      |      |      |
| Capacity (t)                  | 21          |      |      |      |      |
| G-length                      | 49          | 51   | 52   | 53   | 56   |
| System weight (kg) *          | 2040        | 2100 | 2150 | 2200 | 2220 |
| Tipping angle (°)             | 56          | 52   | 52   | 55   | 52   |
| Max. operating pressure (MPa) | 30          |      |      |      |      |
| Recommended oil flow (l/min)  | 80          |      |      |      |      |

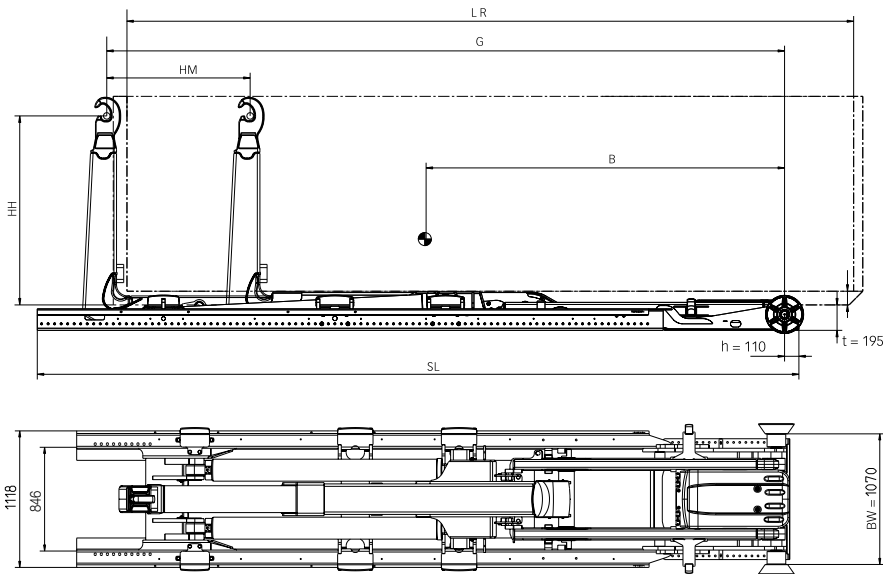

## Primary dimensions

| Technical data                            | ULTIMA 21SL.49            | ULTIMA 21SL.51 | ULTIMA 21SL.52 | ULTIMA 21SL.53 | ULTIMA 21SL.56 |
|---|---------------------------|----------------|----------------|----------------|----------------|
| LR = Body length (m) (min – max)          | 3.9 - 5.6                 | 4.2 – 6.1      | 4.3 – 6.3      | 4.4 – 6.4      | 4.7 – 6.6      |
| BW = Body width (mm)                      | 1070                      |                |                |                |                |
| SL = Subframe length (mm) **              | 5543                      | 5843           | 5843           | 6143           | 6443           |
| B = Centre of gravity (mm)                | 2885                      | 3000           | 3070           | 3150           | 3300           |
| G = Exact G-length (mm)                   | 4830                      | 5060           | 5200           | 5340           | 5560           |
| HM = Horizontal movement (mm)             | 1100                      |                |                |                |                |
| t = Min free tunnel height (body) (mm)*** | 105 / 85                  |                |                |                |                |
| h = Installation height (mm)              | 195 / 215                 |                |                |                |                |
| HH = Hook height (mm)                     | 1400 / 1425 / 1450 / 1570 |                |                |                |                |

\* Weight includes hydraulic body locking and excludes oil tank and oil.

\*\* The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

\*\*\* Varies depending on country and body standard

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

**Disclaimer.** We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.