

# Specification Sheet for WB Range

Company Name: \_\_\_\_\_ Date: \_\_\_\_\_

Order Number: \_\_\_\_\_ Quantity required: \_\_\_\_\_

Deliver Lift     Collect Lift from Del    Delivery Date Required: \_\_\_\_\_

## Do you have a forklift to unload?

Yes     No, require DEL to provide a Fork Lift

## Delivery Address

Company Name: \_\_\_\_\_ Street Address: \_\_\_\_\_

Post Code: \_\_\_\_\_ City: \_\_\_\_\_

## Vehicle Details:


Rigid     Trailer    Chassis Mass: \_\_\_\_\_

## Vehicle Voltage:

12v     24v

## Tip Height Measurements:

Measure the height of the top of the vehicle body to the ground, and check that the lift supplied is suitable for this height.

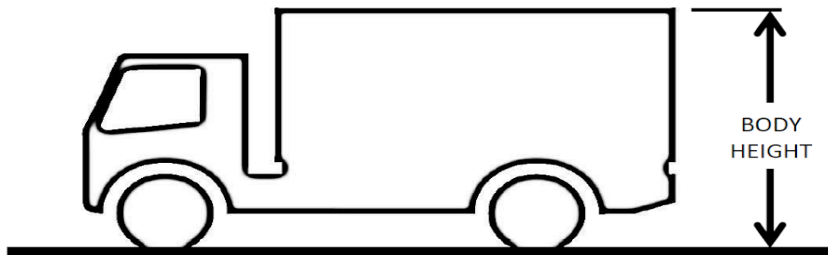

Note that the lift can be used to tip into the side of the body, in these cases the 'body height' dimension will be from the ground to the bottom of the hole in the side of the body, into which the bin will tip.

A tolerance of  $\pm 25\text{mm}$  is acceptable on the tip heights.

## Tail Lift Details

### Lift Capacity:

150kg     300kg

### Drive:

PTO Operated     Pack Operated\*

**\* POWER PACK OPERATED LIFTS ARE FOR OCCASIONAL USE ONLY, MAX 6 LIFTS EVERY 45 MINUTES.**

**Tip Height/ Model Options:**

**150KG Options:**

- 1670mm – 1740mm (WB150-550)  1970mm – 2040mm (WB150-700)  2290mm – 2350mm (WB150-850)
- 2400mm – 2490mm (WB150-914)  2790mm – 2850mm (WB150-1091)  3260mm – 3320mm (WB150-1330)
- 3350mm – 3400mm (WB150-1372)

**300KG Options:**

- 3260mm – 3320mm (**WB300-1330**)\*  3350mm – 3400mm (**WB300-1372**)\*

**\*WB300 Lifts come with a fixed bin which is 150kg of the safe working load. Only Hydraulic Roof available.**

**Roof requirement:**

**Roof Mechanism required:**  Yes  No  Lid Arms only

**Mechanical Roof (Power Pack Operated Lifts)**

730mm Wide x 1107mm Deep. – **Only available on WB150 Lift with tip heights of 1670mm – 2850mm**

**Hydraulic Roof (PTO Operated Lifts). Please select Roof size below:**

1150mm Wide x 1125mm Deep – **Only available on WB300 Lifts**

1200mm Wide x 1625mm Deep - **Only available on WB300 Lifts**

1490mm Wide x 1995mm Deep – **Only available on WB150 Lift with tip heights of 2290mm – 3400mm**

1695mm Wide x 2095mm Deep – **Only available on WB150 Lift with tip heights of 2290mm – 3400mm**

**Roof Magnet required (Only available on Hydraulic Roof):**

Yes  No

**Roof Hinge Type (Only available on Hydraulic Roof):**


90 Degree Angle  Straight

Chute Type required: (N/A on WB300 Lifts)

Standard

Deep (Food Pod)

Extended (Wide)

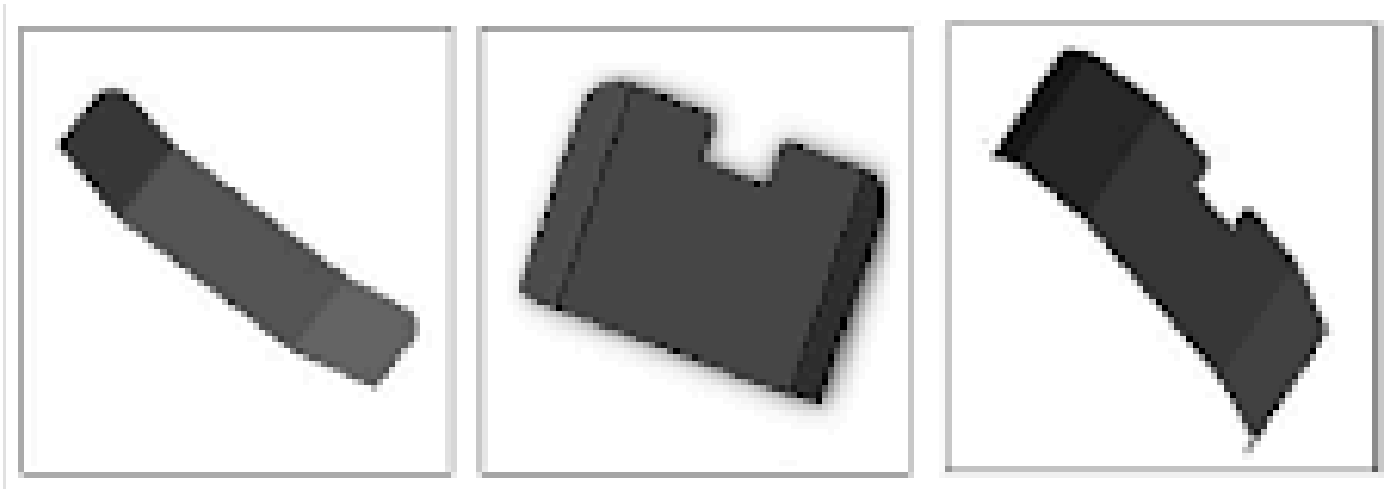

Control Setup:

Fixed Control

Wanderlead

Two handed control station: (Not Available with Wanderlead Control)

Yes

No

Battery & Earth cables required (Power Pack operated Lifts only):

28' Cables (standard)

35' Cables

56' Cables

Cab Warning System:

None

Visual

Audible

Warranty:

2 Year Warranty

3 Year Warranty

4 Year Warranty

5 Year Warranty