

JONSERED 1500RZ




JONSERED 1500RZ BASIC DATA

Technical data	J1500RZ 80	J1500RZ 82	J1500RZ 95
Max. lifting capacity (kNm)	138	139	129
Hydraulic outreach* (m)	8.0	8.2	9.5
Hydraulic boom extension* (m)	1	2	2
Outreach - lifting capacity, standard (m - kg)	3.0 - 4100 4.0 - 3200 5.0 - 2650 6.0 - 2300 7.0 - 1960 7.5 - 1820	3.0 - 4150 4.0 - 3250 5.0 - 2550 6.0 - 2300 7.0 - 1920 7.7 - 1500	3.0 - 3900 4.0 - 3000 5.0 - 2500 6.0 - 2160 7.0 - 1840 8.0 - 1580 9.0 - 1260
Slewing system	Double		
Slewing angle (°)	425		
Slewing torque, gross (kNm)	28.6		
Max. working pressure (MPa) 1)	26		
Recommended oil flow – fixed pump (I/min), 1-pump	120		
Recommended oil flow – fixed pump (I/min), 2-pump	2 x 60-80		
Min. recommended oil flow – variable displacement pump (I/min)	160		
Weight - High seat crane with Standard stabilizer (kg)*	2280	2340	2450

^{*}Weight with fixed pump system, oil weight included

Side view

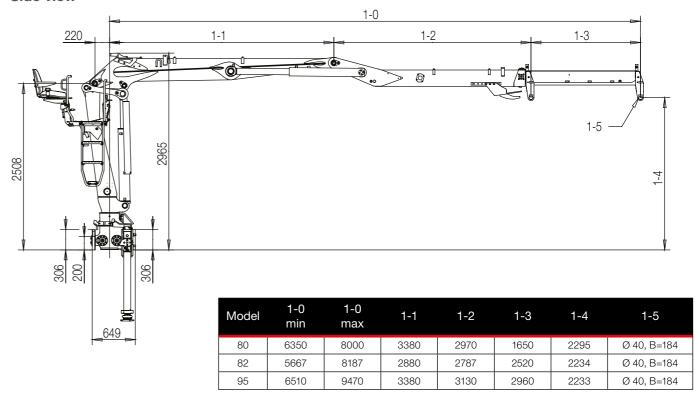



BD-J1500RZ-EN-WW_190208

BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

