


MULTILIFT ULTIMA 24SL


LOW-BUILT RANGE HOOKLIFTS

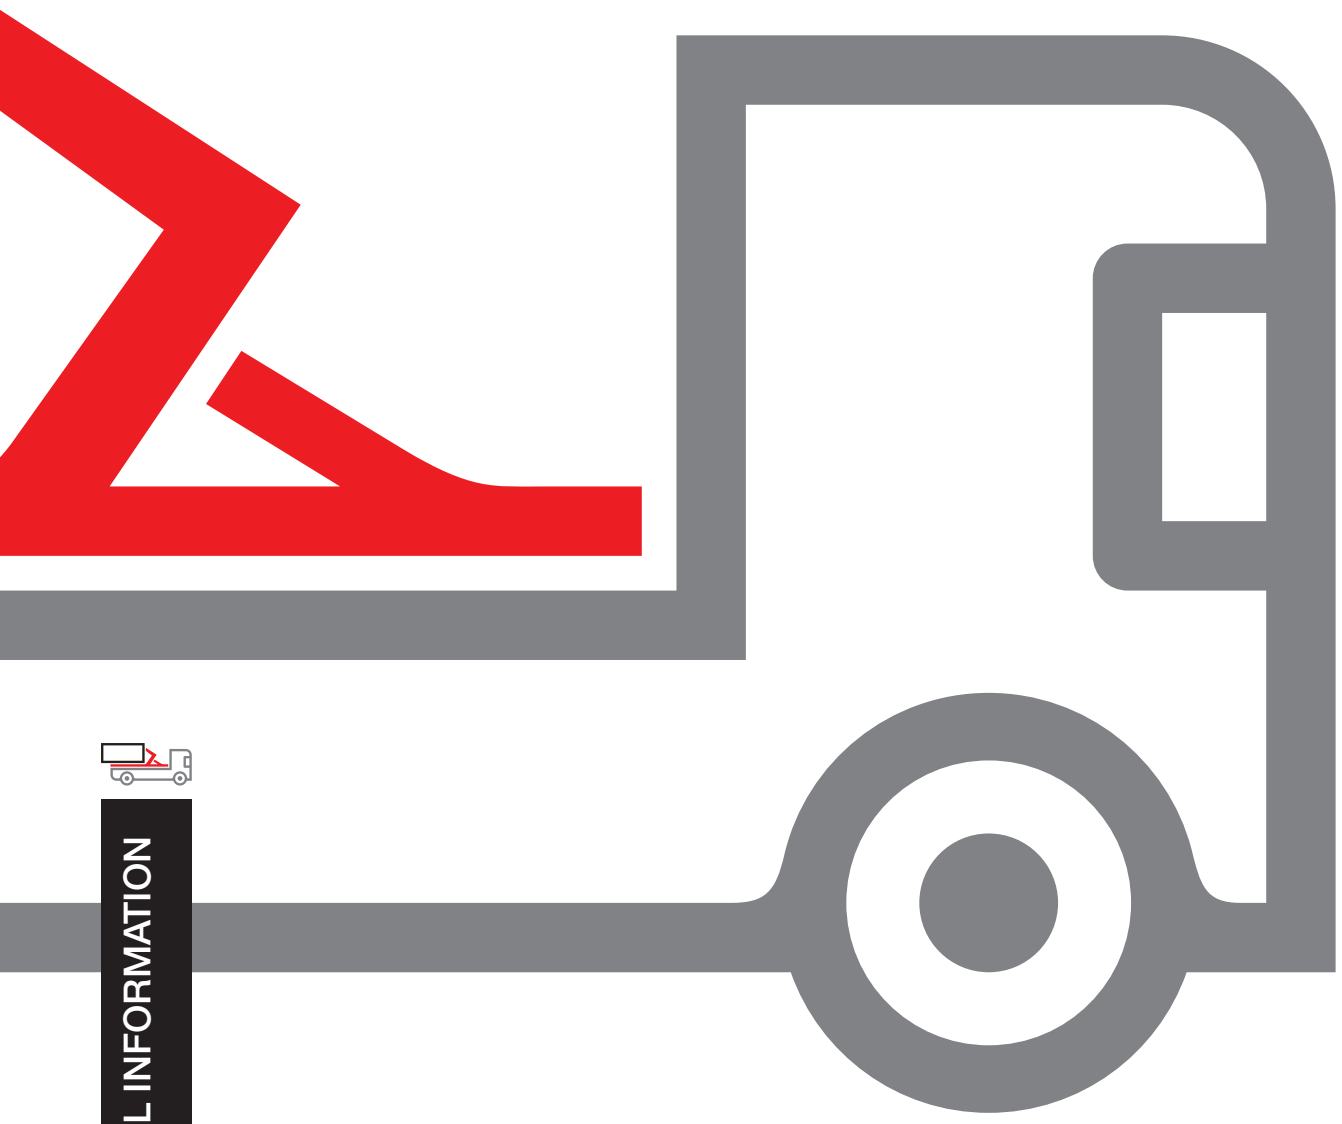

TECHNICAL INFORMATION

MULTILIFT ULTIMA 24SL BASIC DATA

Type	ULTIMA 24SL			
Vehicle type	4 axle			
GVW of the vehicle (t)	32			
Capacity (t)	24			
G-length	56	58	59	61
System weight (kg) *	2480	2540	2540	2550
Tipping angle (°)	52	52	52	52
Max. operating pressure (MPa)	30			
Recommended oil flow (l/min)	100			

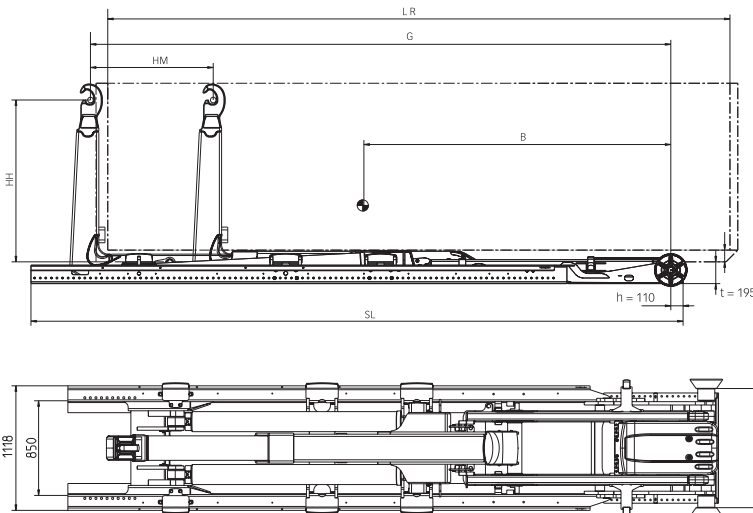

Primary dimensions

Technical data	ULTIMA 24SL.56	ULTIMA 24SL.58	ULTIMA 24SL.59	ULTIMA 24SL.61
LR = Body length (m) (min – max)	4.8 - 6.6	4.9 - 7.0	5.0 - 7.0	5.1 - 7.0
SL = Subframe length (mm) **	6443	6443	6443	6593
BW = Body width (mm)***	1070			
B = Centre of gravity (mm)	3300	3400	3400	3500
G = Exact G-length (mm)	5600	5800	5900	6100
HM = Horizontal movement (mm)	1100	1150	1250	1450
t = Min free tunnel height (body) (mm)***	105 / 85			
h = Installation height (mm)	195 / 215			
HH = Hook height (mm)	1400 / 1425 / 1450 / 1570			

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

*** Varies depending on country and body standard

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.