

Specification Sheet for TL1000GP (Mesh) Range

Company Name: _____ Date: _____

Order Number: _____ Quantity required: _____

Deliver Lift Collect Lift from Del Delivery Date Required: _____

Do you have a forklift to unload?

Yes No, require DEL to provide a Fork Lift

Delivery Address

Company Name: _____ Street Address: _____

Post Code: _____ City: _____

Vehicle Details

Rigid Trailer Chassis Mass: _____

Box Body Curtainsider Dropside

Suspension Type:

Steel Air

Dimension A (**Unladen** Vehicle Floor Height): _____ mm (**Max 1320mm**)


Dimension A (**Laden** Vehicle Floor Height): _____ mm

Dimension B (Overall Width of Vehicle): _____ mm

Dimension C (Loading Aperture): _____ mm

Dimension D (Width of Corner Post): _____ mm

Vehicle Overhang _____ mm

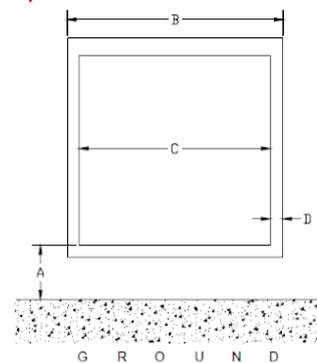

Tail Lift Width required: (Please Note: Column Centres are 63mm less than the sizes below)

2120mm 2210mm 2310mm 2413mm

Vehicle Voltage: (Heavy Duty Battery required on a 12V vehicle, in some cases SWL needs to be reduced to 750KG)

12v* 24v

Underun & Bracing requirement:

R58-03 Underun & Bracing No Underun & Bracing

Tail Lift Details

Lift Capacity:

500kg 750kg 1000kg

Platform Specification:

950mm + 250mm Fixed Ramp inc Trolley Stops
 1250mm + 250mm Fixed Ramp inc Trolley Stops

Control Setup:

Dual Fixed Controls Single External Wanderlead Internal Hard Wired Wanderlead and Fixed External Control
 Slimline Fixed External Control & Internal Fixed Control

Internal Control Bracket:

Bracket with Deflector Plate Bracket with No Deflector Plate

Tail Lift Isolator: **(Not required with Single Detachable Wanderlead)**

Cab Switch Red Key Isolator VDHH

Cable Options:

28' Battery Cables (Standard) 35' Battery Cables

Fence Type:

Auto Erect Fences Wrap Around Fences Dual Mode Fences

Options:

Battery Guard Left Hand Drive
 Stow Light Indicator Two Handed External Control

Warranty options: **(12 month Warranty as standard)**

2 Year Warranty 3 Year Warranty 4 Year Warranty 5 Year Warranty