


# DEL Tuckunder Cut Line Drawing

|   | TUCKUNDER RANGE    | Bed Height |      | Platform Depth |       | Platform Width | Cutout Lines |     |     |     |     |    | Beam Position |     |      |
|---|--------------------|------------|------|----------------|-------|----------------|--------------|-----|-----|-----|-----|----|---------------|-----|------|
|   |                    | MIN        | MAX  | No Stops       | Stops |                | K            | L   | M   | N   | O   | P  | X             | Y   | S*   |
| A | DA1000L MK4 22"    | 855        | 1154 | 1069           | N/A   | 2006           | 189          | 702 | 120 | 100 | 300 | 50 | 803           | 499 | 897  |
| B | DA1000L MK4 24"    | 906        | 1154 | 1159           | 1148  | 2006           | 199          | 744 | 120 | 100 | 300 | 50 | 803           | 499 | 1080 |
| C | DA1000L MP 24"     | 906        | 1154 | 1159           | 1148  | 2006           | 199          | 744 | 120 | 100 | 300 | 50 | 803           | 499 | 954  |
| D | DA1000L MP 26 3/4" | 975        | 1190 | 1219           | 1219  | 2006           | 220          | 794 | 120 | 100 | 300 | 50 | 803           | 499 | 1080 |
| E | DA1000H 30" MK3    | 1190       | 1440 | 1376           | 1426  | 2101           | 255          | 912 | 120 | 100 | 300 | 50 | 929           | 572 | 1146 |
| F | DA1500L            | 1030       | 1190 | 1276           | 1326  | 2101           | 255          | 912 | 120 | 100 | 300 | 50 | 892           | 540 | 1109 |
| G | DA1500H 30" MK4    | 1190       | 1440 | 1376           | 1426  | 2101           | 255          | 912 | 120 | 100 | 300 | 50 | 929           | 572 | 1146 |

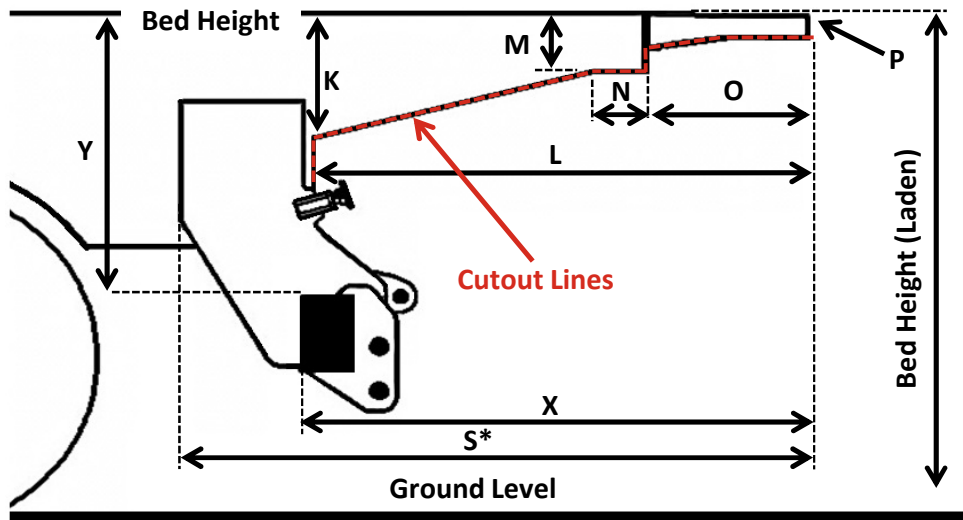

RevF Nov 2014

[www.del-uk.com](http://www.del-uk.com)

+44 (0) 1993 708811

[sales@del-uk.com](mailto:sales@del-uk.com)

\* DEL recommends a 20mm gap between the mounting plate and the spring hanger

