

Specification Sheet for TL1000 Range

Company Name: _____ Date: _____

Order Number: _____ Quantity required: _____

Deliver Lift Collect Lift from Del Delivery Date Required: _____

Do you have a forklift to unload?

Yes No, require DEL to provide a Fork Lift

Delivery Address

Company Name: _____ Street Address: _____

Post Code: _____ City: _____

Vehicle Details:

Rigid Trailer Chassis Mass: _____

Box Body Curtainsider Dropside

Door type (If Barn Door, please fill in Cam Centre Dim below)

Roller Shutter Barn Doors **Cam Centres:** _____ mm ****If Barn Door - Max B/H is 1200mm.**

Suspension Type:

Steel Air

Dimension A (**Unladen** Vehicle Floor Height): _____ mm (**Max 1320mm**)


Dimension A (**Laden** Vehicle Floor Height): _____ mm

Dimension B (Overall Width of Vehicle): _____ mm

Dimension C (Loading Aperture): _____ mm

Dimension D (Width of Corner Post): _____ mm

Vehicle Overhang _____ mm

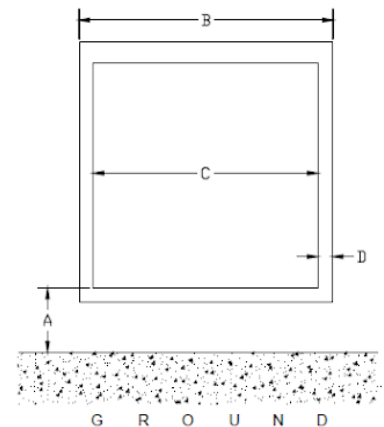

Tail Lift Width required: (Over Column Width)

2120mm 2210mm 2260mm 2310mm

2388mm 2413mm 2464mm 2515mm

Vehicle Voltage: (**Heavy Duty Battery required on a 12V vehicle, in some cases SWL needs to be reduced to 750KG**)

12v* 24v

Underrun & Bracing requirement:

R58-03 Underun & Bracing No Underun & Bracing

Tail Lift Details:

Lift Capacity requirement:

- 500kg 750kg 1000kg

Platform Specification:

- 950mm + 250mm Fixed Ramp inc Trolley Stops 950mm + 3 Way Folding Ramps
 1100mm + 3 Way Folding Ramps 1250mm + 250mm Fixed Ramp inc Trolley Stops
 1250mm + 3 Way Folding Ramps 1550mm + 3 Way Folding Ramps

Side Ramp Type:

- Pair of Hinged Side Ramps

Control Setup:

- Dual Fixed Controls Single External Wanderlead Internal Hard Wired Wanderlead & Fixed External Control
 Slimline Fixed External Control & Fixed Internal Control

Internal Control Bracket:

- Bracket with Deflector Plate Bracket with No Deflector Plate

Tail Lift Isolator: (Not required with Single Detachable Wanderlead)

- Cab Switch Red Key Isolator VDHH

Cable Options:

- 28' Battery Cables (Standard) 35' Battery Cables 35' Trailer Wiring 45' Trailer Wiring

Fence Type:

- Auto Erect Fences Pair of Detachable Fences Fence Socket Kit (No Fences)
 Pair of Wrap Around Fences Dual Mode Fences (If required, Max Width is 2464mm)

Options:

- Battery Guard Flashing Lights Left Hand Drive
 Stow Light Indicator Two Handed External Control Anti-Slip Overlay (Spec Dependent)

Warranty: (12 month Warranty as standard)

- 2 Year Warranty 3 Year Warranty 4 Year Warranty 5 Year Warranty