

# Specification Sheet for TL1000 Range

Company Name: \_\_\_\_\_ Date: \_\_\_\_\_

Order Number: \_\_\_\_\_ Quantity required: \_\_\_\_\_

Deliver Lift  Collect Lift from Del Delivery Date Required: \_\_\_\_\_

## Do you have a forklift to unload?

Yes  No, require DEL to provide a Fork Lift

## Delivery Address

Company Name: \_\_\_\_\_ Street Address: \_\_\_\_\_

Post Code: \_\_\_\_\_ City: \_\_\_\_\_

## Vehicle Details:

Rigid  Trailer Chassis Mass: \_\_\_\_\_

Box Body  Curtainsider  Dropside

**Door type** (If Barn Door, please fill in Cam Centre Dim below)

Roller Shutter  Barn Doors **Cam Centres:** \_\_\_\_\_ mm **\*\*If Barn Door - Max B/H is 1200mm.**

## Suspension Type:

Steel  Air

Dimension A (**Unladen** Vehicle Floor Height): \_\_\_\_\_ mm (**Max 1320mm**)


Dimension A (**Laden** Vehicle Floor Height): \_\_\_\_\_ mm

Dimension B (Overall Width of Vehicle): \_\_\_\_\_ mm

Dimension C (Loading Aperture): \_\_\_\_\_ mm

Dimension D (Width of Corner Post): \_\_\_\_\_ mm

Vehicle Overhang \_\_\_\_\_ mm

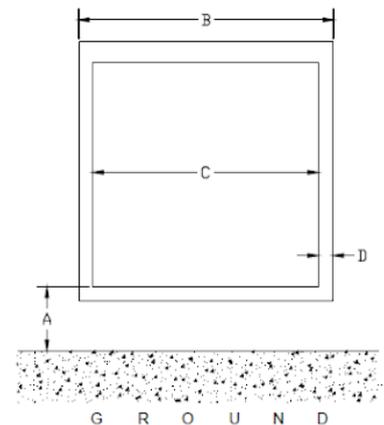

## Tail Lift Width required: (Over Column Width)

2120mm  2210mm  2260mm  2310mm

2388mm  2413mm  2464mm  2515mm

**Vehicle Voltage:** (Heavy Duty Battery required on a 12V vehicle, in some cases SWL needs to be reduced to 750KG)

12v\*  24v

## Underrun & Bracing requirement:

R58-03 Underun & Bracing  No Underun & Bracing

## Tail Lift Details:

### Lift Capacity requirement:

- 500kg       750kg       1000kg

### Platform Specification:

- 950mm + 250mm Fixed Ramp inc Trolley Stops       950mm + 3 Way Folding Ramps  
 1100mm + 3 Way Folding Ramps       1250mm + 250mm Fixed Ramp inc Trolley Stops  
 1250mm + 3 Way Folding Ramps       1550mm + 3 Way Folding Ramps

### Side Ramp Type:

- Pair of Hinged Side Ramps

### Control Setup:

- Dual Fixed Controls       Single External Wanderlead       Internal Hard Wired Wanderlead & Fixed External Control  
 Slimline Fixed External Control & Fixed Internal Control

### Internal Control Bracket:

- Bracket with Deflector Plate       Bracket with No Deflector Plate

### Tail Lift Isolator: (Not required with Single Detachable Wanderlead)

- Cab Switch       Red Key Isolator       VDHH

### Cable Options:

- 28' Battery Cables (Standard)       35' Battery Cables       35' Trailer Wiring       45' Trailer Wiring

### Fence Type:

- Auto Erect Fences       Pair of Detachable Fences       Fence Socket Kit (No Fences)  
 Pair of Wrap Around Fences       Dual Mode Fences (If required, Max Width is 2464mm)

### Options:

- Battery Guard       Left Hand Drive  
 Stow Light Indicator       Two Handed External Control       Anti-Slip Overlay (Spec Dependent)

### Warranty: (12 month Warranty as standard)

- 2 Year Warranty       3 Year Warranty       4 Year Warranty       5 Year Warranty