

Specification Sheet for Gas Bottle Range

Company Name: _____ Date: _____

Order Number: _____ Quantity required: _____

Deliver Lift Collect Lift from Del Delivery Date Required: _____

Do you have a forklift to unload?

Yes No, require DEL to provide a Fork Lift

Delivery Address

Company Name: _____ Street Address: _____

Post Code: _____ City: _____

Vehicle Details:

Rigid Trailer Chassis Mass: _____

Box Body Curtainsider Dropside

Door type (Not suitable for Barn Doors)

Roller Shutter None

Suspension Type:

Steel Air

Dimension A (Unladen Vehicle Floor Height): _____ mm (Max 1320mm)


Dimension A (Laden Vehicle Floor Height): _____ mm

Dimension B (Overall Width of Vehicle): _____ mm

Dimension C (Loading Aperture): _____ mm

Dimension D (Width of Corner Post): _____ mm

Vehicle Overhang _____ mm

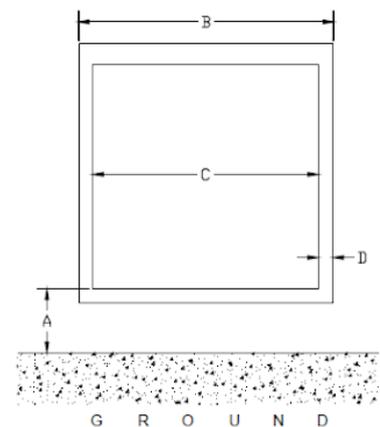

Tail Lift Width required: (Over Column Width)

2082mm 2120mm 2210mm 2260mm 2310mm

2388mm 2413mm 2464mm 2515mm

Vehicle Voltage: (Heavy Duty Battery required on a 12V vehicle, in some cases SWL needs to be reduced to 750KG)

12v* 24v

Underrun & Bracing requirement:

R58-03 Underun & Bracing No Underun & Bracing

Tail Lift Details:

Lift Capacity requirement: (500kg & 750kg are derated 1000kg lifts)

500kg* 750kg* 1000kg

Lift Specification:

950mm + 3 Way Folding Ramp & Gas Bottle Fences

Control Setup:

Dual Fixed Controls Single External Wanderlead Internal Hard Wired Wanderlead & Fixed External Control
 Slimline Fixed External Control & Fixed Internal Control

Internal Control Bracket:

Bracket with Deflector Plate Bracket with No Deflector Plate

Tail Lift Isolator: (Not required with Single Detachable Wanderlead)

Cab Switch Red Key Isolator VDHH

Cable Options:

28' Battery Cables (Standard) 35' Battery Cables 35' Trailer Wiring 45' Trailer Wiring

Options:

Battery Guard Stow Light Indicator Two Handed External Control
 Left Hand Drive

Warranty: (12 month Warranty as standard)

2 Year Warranty 3 Year Warranty