

Hiab Multilift

XR Power range hooklifts




TECHNICAL INFORMATION

XR14T

TECHNICAL DATA

ТҮРЕ	XR14T				
VEHICLE TYPE	2 axle				
GVW OF THE VEHICLE (t)	19				
CAPACITY (t)	14				
G-LENGTH	41	43	46	51	
SYSTEM WEIGHT (kg) *	1610	1640	1670	1770	
TIPPING ANGLE (°)	49	47	50	49	
MAX. OPERATING PRESSURE (MPa)	30				
RECOMMENDED MAX. OIL FLOW (I/min)	60 (special 100)				

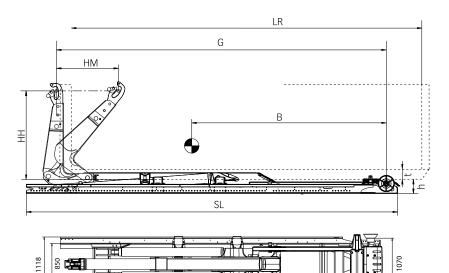

- * Weight includes hydraulic body locking and excludes oil tank and oil.
- ** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.
- *** Other hook heights for different body standards available.

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

PRIMARY DIMENSIONS

MODEL	XR14T.41	XR14T.43	XR14T.46	XR14T.51	
LR = BODY LENGTH (m) min - max	3,4 - 5,1	3,6 - 5,3	3,8 - 5,6	4,3 - 6,1	
SL = SUBFRAME LENGTH (mm) **	4808	4958	5308	5758	
B = CENTRE OF GRAVITY (mm)	2280	2390	2550	2800	
G = EXACT G-LENGTH (mm)	4080	4250	4580	5080	
HM = HORIZONTAL MOVEMENT (mm)	900	900	1100	1100	
t = MIN. FREE TUNNEL HEIGHT (body) (mm)	125				
h = INSTALLATION HEIGHT (mm)	230				
HH = HOOK HEIGHT (mm) ***	1570				

www.hiab.com

BD-XR14T-EN-DIN_110809