

Specification Sheet for S1500 Range

Company Name: _____ Date: _____

Order Number: _____ Quantity required: _____

☐ Deliver Lift ☐ Collect Lift from Del Delivery Date Required: _____

Do you have a forklift to unload?

☐ Yes ☐ No, require DEL to provide a Fork Lift

Delivery Address:

Company Name: _____ Street Address: _____

Post Code: _____ City: _____

Vehicle Details:

☐ Rigid ☐ Trailer Chassis Mass: _____

☐ Box Body ☐ Curtainsider ***This Lift is NOT suitable for Dropside / Flatbed Bodies.**

Door type (If Barn Door, please fill in Cam Centre Dim below)

☐ Roller Shutter ☐ Barn Doors ☐ Curtainsider **Cam Centres:** _____ mm

Suspension Type:

☐ Steel ☐ Air

Dimension A (**Unladen** Vehicle Floor Height): _____ mm (**Max 1470mm**)


Dimension A (**Laden** Vehicle Floor Height): _____ mm (**Min 1100mm**)

Dimension B (Overall Width of Vehicle): _____ mm

Dimension C (Loading Aperture): _____ mm

Dimension D (Width of Corner Post): _____ mm

Vehicle Overhang _____ mm

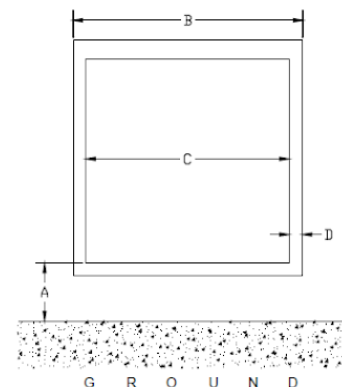

Tail Lift Width Required:

☐ 2412mm ☐ 2457mm ☐ 2487mm* ☐ 2512mm

***Please Note: 2487mm is the max width allowed for Lifts with Dual Mode Fences as they protrude 30mm per side.**

Vehicle Voltage:

☐ 24v

Underrun & Bracing requirement:

☐ R58-03 Underun & Bracing ☐ No Underun & Bracing

Tail Lift Details

Lift Capacity:

☐ 1500kg

Platform Specification:

☐ 1065mm + 3 Way Folding Ramps

☐ 1220mm + 3 Way Folding Ramps

☐ 1525mm + 3 Way Folding Ramps

Side Ramp Type:

☐ Pair of Hinged Side Ramps **(Please note: These Ramps protrude the Columns by 18mm per side).**

Control Setup:

☐ Dual Fixed Controls

☐ Single Detachable Wanderlead

☐ Internal Hard Wired Wanderlead and Fixed External Control

☐ Slimline Fixed External Control & Fixed Internal Control

Internal Control Bracket: **(If second Control required)**

☐ Bracket with Deflector Plate

☐ Bracket with No Deflector Plate

Tail Lift Isolator: **(Not required with Single Detachable Wanderlead).**

☐ Cab Switch

☐ Red Key Isolator

☐ VDHH

Cable Options:

☐ 35' Battery Cables (Standard)

☐ 45' Battery Cables

☐ 35' Trailer Wiring

☐ 45' Trailer Wiring

Fence Type:

☐ Dual Mode Fences

☐ Pair of Detachable Fences

☐ Fence Socket Kit (No Fences)

Options:

☐ Battery Guard

☐ Flashing Lights

☐ Stow Light Indicator

☐ Two Handed Control

☐ Left Hand Drive

Warranty options: **(12 month Warranty as standard)**

☐ 2 Year Warranty

☐ 3 Year Warranty

☐ 4 Year Warranty

☐ 5 Year Warranty