

# Specification Sheet for Tuckunder Range

Company Name: \_\_\_\_\_ Date: \_\_\_\_\_

Order Number: \_\_\_\_\_ Quantity required: \_\_\_\_\_

Deliver Lift     Collect Lift from Del    Delivery Date Required: \_\_\_\_\_

## Do you have a forklift to unload?

Yes     No, require DEL to provide a Fork Lift

## Delivery Address

Company Name: \_\_\_\_\_ Street Address: \_\_\_\_\_

Post Code: \_\_\_\_\_ City: \_\_\_\_\_

## Vehicle Details:


Rigid     Trailer     Curtainsider

Dimension A (Unladen Floor Height): \_\_\_\_\_ mm

Dimension B (Laden Floor Height): \_\_\_\_\_ mm

Dimension C (Distance from vehicle Floor to underside of the chassis): \_\_\_\_\_ mm

Dimension D (Distance from rear of Body to spring hanger): \_\_\_\_\_ mm

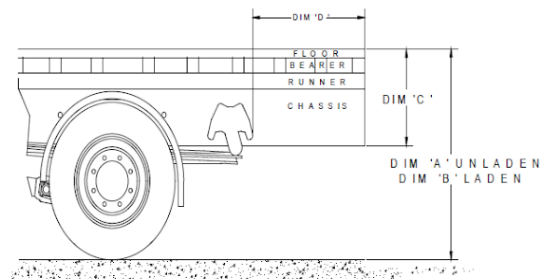

## Vehicle Voltage:

12v\*     24v    **\*\*12v only available on 1000kg Lift. Heavy Duty Battery required on vehicle and in some cases, Lift may have to be reduced to 750kgs lifting capacity.**

Chassis Mass: \_\_\_\_\_ Chassis Make & Model: \_\_\_\_\_

Chassis Width: \_\_\_\_\_

## Suspension Type:

Steel     Air

## Floor Plates:

Standard Floor Plate (Primer)     No Floor Plate     Floor Plate to allow a Step to be fitted

Floor Plate to be sent in advance:  Yes     No

**\*Please Note, if the Floor Plate is required in advance, there will be an additional carriage cost of £35.00\***

## Tail Lift Details

### Lift Options:

DA1000L (Low Bed) to suit Floor Heights on Technical Information on page 3. **(Line D)**

Platform Size = 40" (1016mm) Working surface + 8" (205mm) Ramp + Trolley Stops.

DA1500H (High Bed) to suit Floor Heights on Technical Information on page 3. **(Line G)**

Platform Size = 48" (1220mm) Working surface + 8" (205mm) Ramp + Trolley Stops.

**\*\*\*All Lines on the cut line drawing, excluding Lines D & G are now obsolete\*\*\***

### Control Setup:

Single External Detachable Wanderlead       Internal Hard Wired Wanderlead & Fixed External Control

Internal Hard Wired Wanderlead & Fixed Slimline External Control

### Internal Control Bracket: **(If second Control required)**

Bracket with Deflector Plate       Bracket with No Deflector Plate

### Tail Lift Isolator:

Cab Switch **(Not required with Detachable Wanderlead)**       Red Key Isolator

### Cable Options:

28' Battery Cables (Standard on DA1000)     35' Battery Cables (Standard on DA1500)     45' Battery Cables

35' Trailer Wiring       45' Trailer Wiring

### Fence Type:

Pair of Drop in Fences       Sockets only for Drop in Fences

Pair of Drop in Fences & Spare Sockets for Vehicle storage.

### Options:


Battery Guard       Flashing Lights       Stow Light Indicator

Bolt on Light Bracket Assembly

### Warranty Options: **(12 month Warranty as standard)**

2 Year Warranty       3 Year Warranty       4 Year Warranty       5 Year Warranty

HIAB	TUCKUNDER RANGE	Bed Height		Platform Depth		Platform Width	Cutout Lines					Beam Position			
		MIN	MAX	No Stops	Stops		K	L	M	N	O	P	X	Y	S*
A	DA1000L MK4 22"	855	1154	1069	N/A	2006	189	702	120	100	300	50	803	499	897
B	DA1000L MK4 24"	906	1154	1159	1148	2006	199	744	120	100	300	50	803	499	1080
C	DA1000L MP 24"	906	1154	1159	1148	2006	199	744	120	100	300	50	803	499	954
D	DA1000L MP 26 3/4"	975	1190	1219	1219	2006	220	794	120	100	300	50	803	499	1080
E	DA1000H 30" MK3	1190	1440	1376	1426	2101	255	912	120	100	300	50	929	572	1146
F	DA1500L	1030	1190	1276	1326	2101	255	912	120	100	300	50	892	540	1109
G	DA1500H 30" MK4	1190	1440	1376	1426	2101	255	912	120	100	300	50	929	572	1146
H	ZR15/20-140L	1190	1260								300	50	1108	480	1196
I	ZR15/20-140H	1261	1400								300	50	979	640	1067

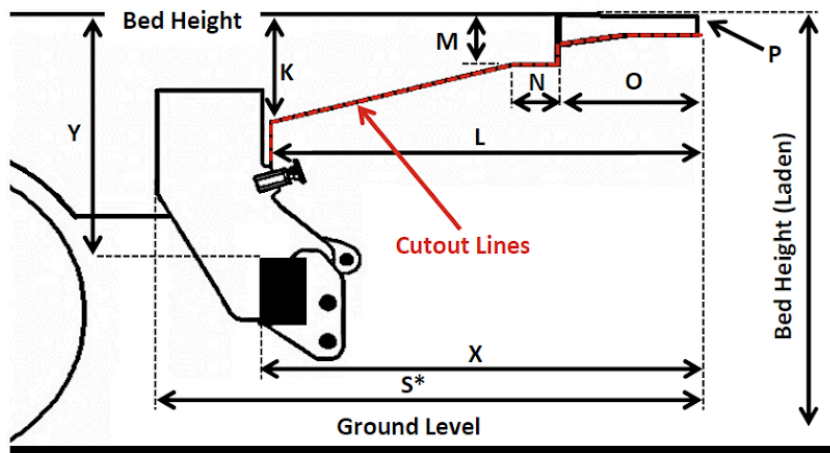

\* DEL recommends a 20mm gap between the mounting plate and the spring hanger

RevG Mar 2016

[www.del-uk.com](http://www.del-uk.com)

+44 (0) 1993 708811

[sales@del-uk.com](mailto:sales@del-uk.com)