

Specification Sheet for Tuckunder Range

Company Name: _____ Date: _____

Order Number: _____ Quantity required: _____

Deliver Lift Collect Lift from Del Delivery Date Required: _____

Do you have a forklift to unload?

Yes No, require DEL to provide a Fork Lift

Delivery Address

Company Name: _____ Street Address: _____

Post Code: _____ City: _____

Vehicle Details:


Rigid Trailer Curtainsider

Dimension A (Unladen Floor Height): _____ mm

Dimension B (Laden Floor Height): _____ mm

Dimension C (Distance from vehicle Floor to underside of the chassis): _____ mm

Dimension D (Distance from rear of Body to spring hanger): _____ mm

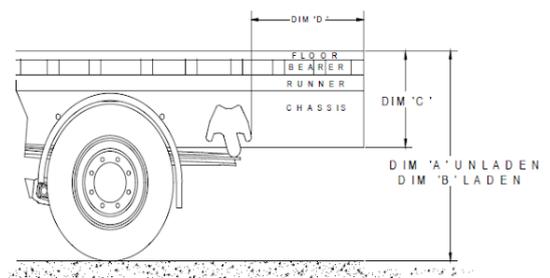

Vehicle Voltage:

12v* 24v ****12v only available on 1000kg Lift. Heavy Duty Battery required on vehicle and in some cases, Lift may have to be reduced to 750kgs lifting capacity.**

Chassis Mass: _____ Chassis Make & Model: _____

Chassis Width: _____

Suspension Type:

Steel Air

Floor Plates:

Standard Floor Plate (Primer) No Floor Plate Floor Plate to allow a Step to be fitted

Floor Plate to be sent in advance: Yes No

Please Note, if the Floor Plate is required in advance, there will be an additional carriage cost of £35.00

Tail Lift Details

Lift Options:

DA1000L (Low Bed) to suit Floor Heights on Technical Information on page 3.

Platform Size = 40" (1016mm) Working surface + 8" (205mm) Ramp + Trolley Stops.

DA1500H (High Bed) to suit Floor Heights on Technical Information on page 3.

Platform Size = 48" (1220mm) Working surface + 8" (205mm) Ramp + Trolley Stops.

Control Setup:

Single External Detachable Wanderlead Internal Hard Wired Wanderlead & Fixed External Control

Internal Hard Wired Wanderlead & Fixed Slimline External Control

Internal Control Bracket: (If second Control required)

Bracket with Deflector Plate Bracket with No Deflector Plate

Tail Lift Isolator:

Cab Switch (Not required with Detachable Wanderlead) Red Key Isolator

Cable Options:

28' Battery Cables (Standard on DA1000) 35' Battery Cables (Standard on DA1500) 45' Battery Cables

35' Trailer Wiring 45' Trailer Wiring

Fence Type:

Pair of Drop in Fences Sockets only for Drop in Fences

Pair of Drop in Fences & Spare Sockets for Vehicle storage.


Options:

Battery Guard Stow Light Indicator Bolt on Light Bracket Assembly

Warranty Options: (12 month Warranty as standard)

2 Year Warranty 3 Year Warranty 4 Year Warranty 5 Year Warranty


TUCKUNDER RANGE		Bed Height	
		MIN*	MAX
A	DA1000	975	1190
B	DA1500	1190	1420

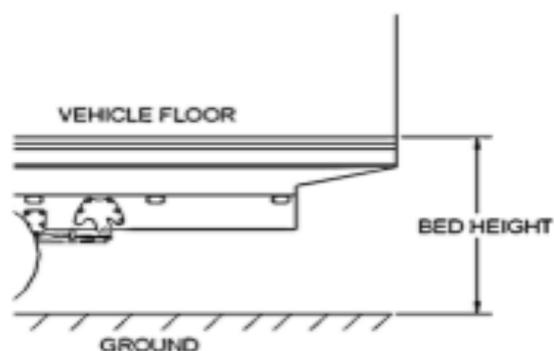

* MIN Bed Height is the **Laden** Bed Height

3. Measure the platform depth to ensure that the platform is suitable for the vehicle's **laden** bed height.

TUCKUNDER RANGE		Platform Depth	
		No Stops	Stops
A	DA1000	1219	1219
B	DA1500	1376	1426

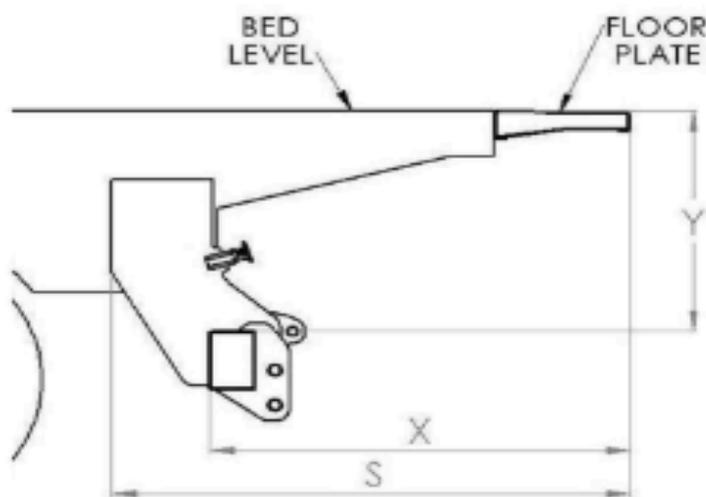

TUCKUNDER RANGE		X	Y	S
A	DA1000	803	499	1080
B	DA1500	929	572	1146