

JONSERED 2850S




JONSERED 2850S BASIC DATA

Technical data	J2850S 83	J2850S 86	J2850S 91	J2850S 97
Max. lifting capacity (kNm)	265	263	260	256
Hydraulic outreach* (m)	8.3	8.6	9.1	9.7
Number of extensions	1	1	1	1
Outreach - lifting capacity, standard (m - kg)	3.0 - 7400	3.0 - 7300	3.0 - 7100	3.0 - 7100
	4.0 - 6400	4.0 - 6400	4.0 - 6200	4.0 - 6200
	5.0 - 5300	5.0 - 5200	5.0 - 5100	5.0 - 5000
	6.0 - 4450	6.0 - 4400	6.0 - 4300	6.0 - 4250
	7.0 - 3800	7.0 - 3800	7.0 - 3750	7.0 - 3650
	8.0 - 3300	8.0 - 3300	8.0 - 3250	8.0 - 3200
Slewing system	Double			
Slewing angle (°)	415			
Slewing torque, gross (kNm)	48			
Max. working pressure (MPa)	28			
Recommended oil flow – fixed pump (l/min), 2-pump	2 x 90			
Weight - High seat crane with standard stabilizer (kg)*	2990	3020	3060	3110

* Weight with fixed pump system, oil weight included

Side view

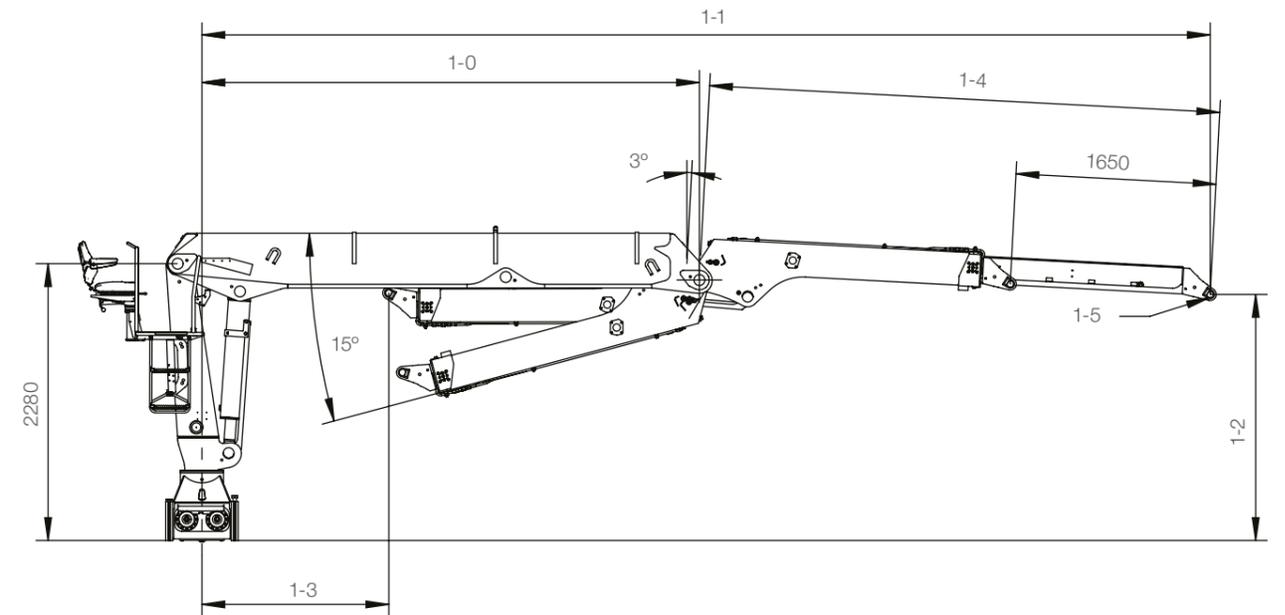

Model	1-0	1-1 min	1-1 max	1-2	1-3	1-4	1-5
83	4100	6660	8305	1640	1540	4210	Ø 40, B=184
86	4400	6960	8605	1640	1840	4210	Ø 40, B=184
91	4400	7460	9105	1590	1340	4710	Ø 40, B=184
97	5000	8060	9705	1590	1940	4710	Ø 40, B=184

For more information,
please visit us at www.hiab.com



BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

BD-J2850S-EN-WW_190131