Specification Sheet for FC500 / 750 Range

Company Name: _____ Date: _____

Order Number: _____ Quantity required: _____

☐ Deliver Lift ☐ Collect Lift from Del Delivery Date Required: _____

Do you have a forklift to unload?

☐ Yes ☐ No, require DEL to provide a Fork Lift

Delivery Address

Company Name: _____ Street Address: _____

Post Code: _____ City: _____

Vehicle Details

☐ Rigid

Vehicle Type:

☐ Box Van ☐ Curtainsider

Vehicle Make & Model: _____

Chassis Mass: _____

For Dimensions Information, see Sheet 4.

Dimension A (Floor Height): _____ mm **(Max 1060mm)**

****For Low Floor Vehicles the minimum Floor Height requirement is 600mm Laden.**

Vehicle Voltage:

☐ 12v ☐ 24v

Please select Dimension L (Distance from the vehicle floor to the top of the lift roof) size below:

☐ 2160mm ☐ 2220mm ☐ 2240mm ☐ 2275mm ☐ 2300mm ☐ 2320mm

☐ 2345mm ☐ 2400mm ☐ 2475mm ☐ 2515mm ☐ 2545mm ☐ 2605mm

Please select W (Width over Panels) size below:

☐ 2065mm ☐ 2075mm ☐ 2085mm ☐ 2090mm

☐ 2135mm ☐ 2190mm ☐ 2235mm ☐ 2280mm

DEL Sales | Tel: 01993 708811 | E-mail: taillift.orders@hiab.com | del-uk.com

Tail Lift Details

Lift Capacity:

☐ 500kg ☐ 750kg

Platform Working Area:

☐ 1065mm ☐ 1168mm ☐ 1370mm

Rear Ramp Type:

☐ 205mm Fixed Leading Edge (Trolley Stops standard)

External Control:

☐ Slimline pre-wired Control ☐ Fixed Control ☐ Detachable Wanderlead

Internal Control:

☐ Fixed Control ☐ Hard wired Wanderlead ☐ None **(Only applicable with Detachable Wanderlead)**

Internal Control Bracket: (If second Control required)

☐ Bracket with Deflector Plate ☐ Bracket with No Deflector Plate

Tail Lift Isolator: (Not required if you have Single Detachable Wanderlead).

☐ Cab Switch ☐ Red Key Isolator ☐ VDHH

Cable Options:

☐ 24' Battery Cables (Standard) ☐ 35' Battery Cables ☐ Plug & Play Kit **(Please see page 3 for details)**

Fence Type: (Auto Erect Fences not suitable for FC750)

☐ N/S Drop Down Fence & O/S Auto Erect Fence ☐ O/S Drop Down Fence N/S Auto Erect Fence ☐ Pair of Drop Down Fences

☐ Pair of Auto Erect Fences ☐ Pair of Drop in Fences ☐ Sockets only for Drop in Fences

Options:

☐ Low Floor Application (Bed Heights lower than 800mm) ☐ Battery Guard ☐ Left Hand Drive

Warranty Options: (12 Month Warranty as standard)

☐ 2 Year Warranty ☐ 3 Year Warranty ☐ 4 Year Warranty ☐ 5 Year Warranty

Plug & Play Kit Options: (Only available on FC500)


☐ Option 1 – Plug & Play on Power, Earth & 2-Core Only.


Cables attached to the Tail Lift Power Pack/ Beam:
1800mm CABLE FOR CAB SWITCH WITH PLUG
2000mm BATTERY CABLES WITH PLUG


Kit Box sent in advance includes:
21' POWER CABLE (WIRED TO ANDERSON PLUG)
WIRED TO 200A MEGA FUSE
21' EARTH CABLE (WIRED TO ANDERSON PLUG)
30' 2 CORE FOR CAB SWITCH WITH CONNECTOR
CAB SWITCH KIT

☐ Plug & Play Kit to be supplied with the Lift ☐ Plug & Play Kit sent in advance (**large volume orders only**).


DEL Sales | Tel: 01993 708811 | E-mail: taillift.orders@hiab.com | del-uk.com

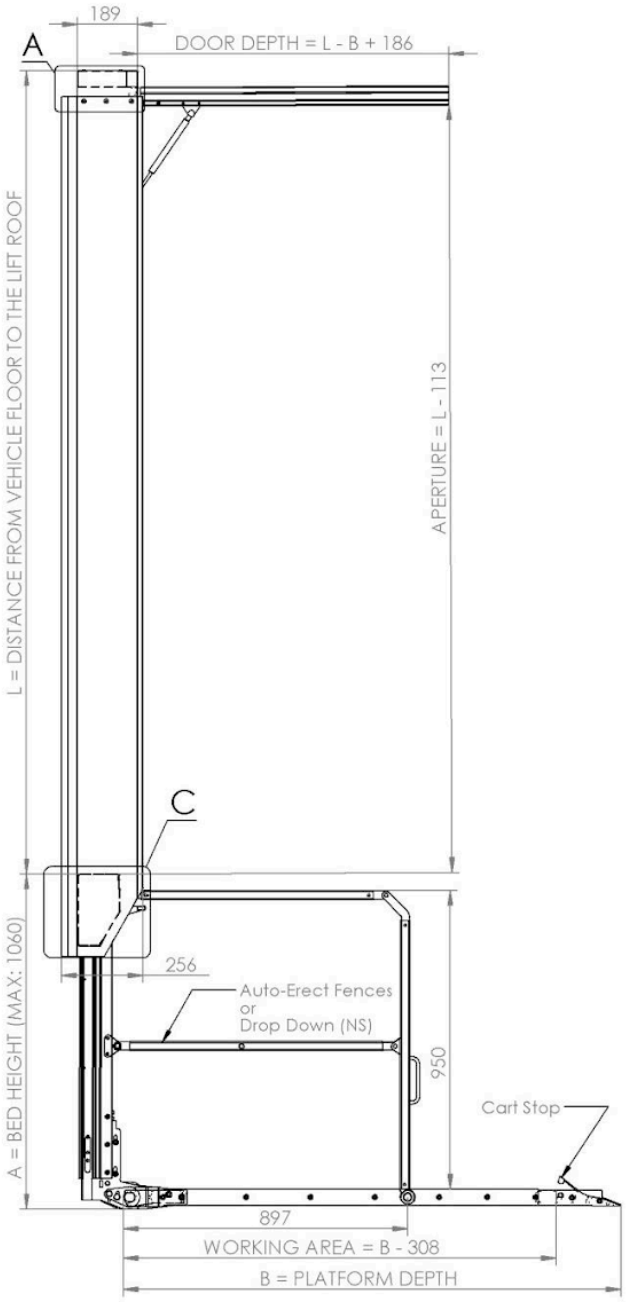

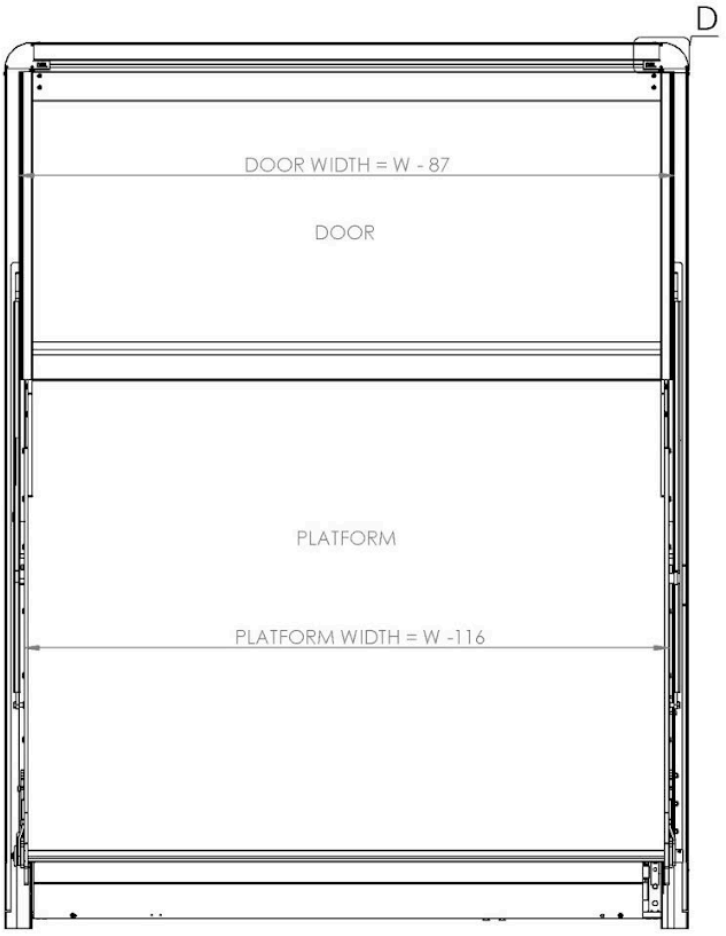


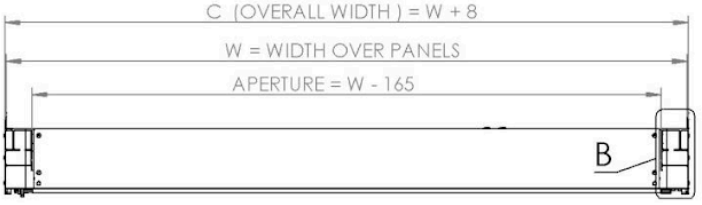


DETAIL A

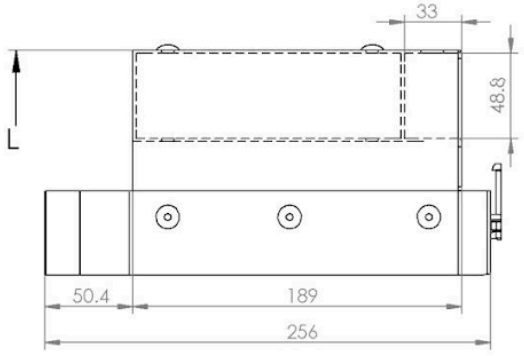


DETAIL B

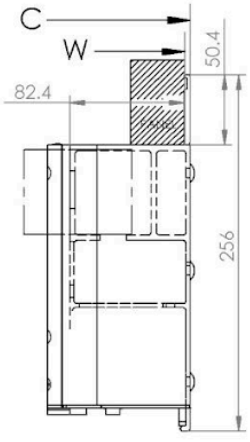

DETAIL C



DETAIL D

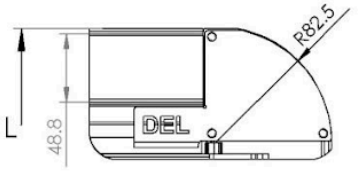

DELQF711 ISSUE 12