

LOGLIFT 82Z




LOGLIFT 82Z BASIC DATA

Technical data	F82Z 72	F82Z 84
Max. lifting capacity (kNm)	82	77
Hydraulic outreach* (m)	7.2	8.4
Number of extensions	1	2
Outreach - lifting capacity, standard (m - kg)	4.0 - 1820	4.0 - 1700
	5.0 - 1620	5.0 - 1500
	6.0 - 1380	6.0 - 1280
	6.9 - 1200	7.0 - 1080 8.0 - 920
Slewing system	Single	
Slewing angle (°)	415	
Slewing torque, gross (kNm)	18.2	
Max. working pressure (MPa)	23.5	
Recommended oil flow – fixed pump (l/min), 2-pump	2 x 50-60	
Weight - High seat crane with standard stabilizer (kg)*	1670	

*Weight with fixed pump system, oil weight included

Side view

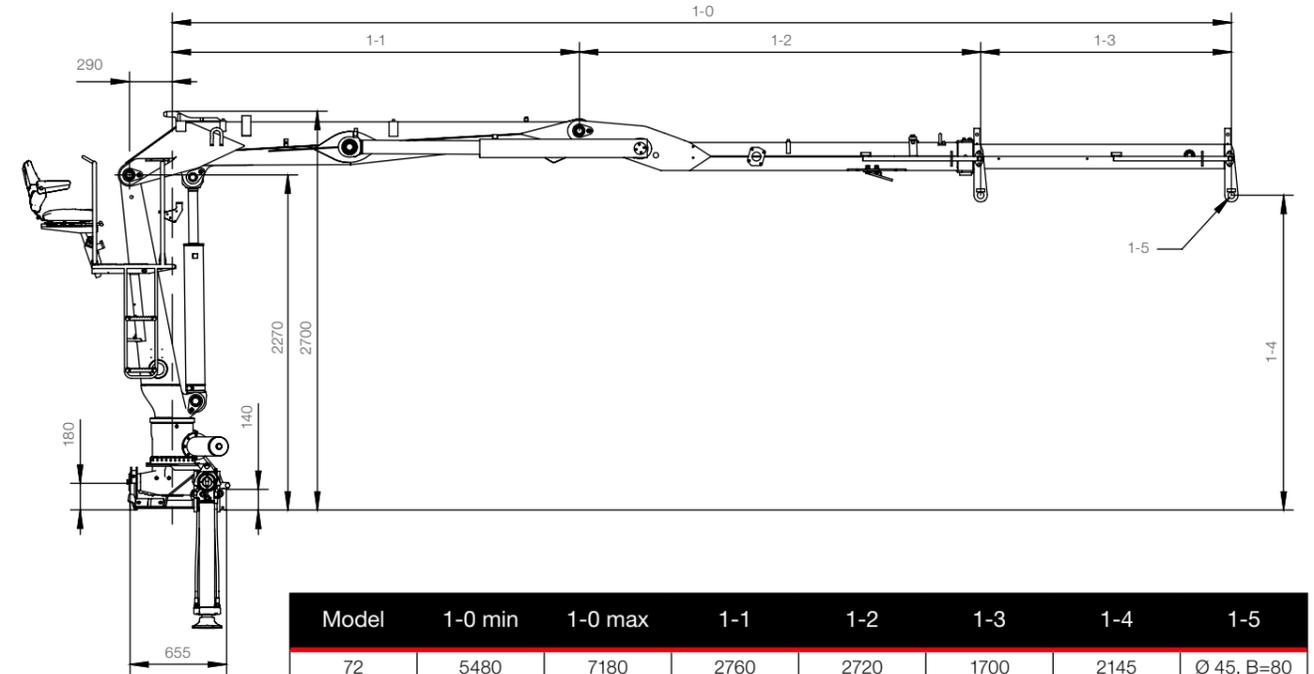

Model	1-0 min	1-0 max	1-1	1-2	1-3	1-4	1-5
72	5480	7180	2760	2720	1700	2145	Ø 45, B=80
84	5530	8430	2760	2770	2900	2060	Ø 45, B=80

For more information,
please visit us at www.hiab.com



BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.